

#### Agenda – DAY 2

The "Ready-to Fill" Syringe Example Specification

#### **Plunger stoppers, Needle Shields, Tip caps** *Materials and Properties, Functionality, production; Extractables*

#### Manufacturing Aspects in Fill & Finish and Assembly

Bulk versus Nested, Nest Sizes, Rod insertion, Handling of Syringes, Labeling, glass to glass contact

#### Assembly of Syringes and Administration Devices

Pen Injectors, Safety systems, Autoinjectors, Manual versus Automated Assmbly

**Design independant Assembly** 

Hands-on Session 2, Mind map, Lottery





### Requirements Primary Packaging Containers

### Consider container materials from the beginning

Critical contact material Device (functions) and container at the same time

#### Fill and Finish compatibility

- Standardization needed
- Transparency (visual inspection)
- Sterilization







### Requirements Primary Packaging Containers

#### **Physical characteristics**

- Material/ breakability
- Design, size, wall thickness
- standardized by ISO
- Long term storage
- Opening forces
- Delivery forces
- Closure integrity (CCI)

#### **Chemical characteristics**

- USP, EP, JP tests
- L&E, Trace metals, impurities
- Stability/interactions with drug substance
- Endotoxin level
- Biocompatability
- Subvisible particles







### Requirements Primary Packaging Containers

#### Patient /end user

- Functionality
  - Cap removal, gliding force, needle pentration pain
- Adminstration volume
- Autoinjectors
- Safety syringes and needle stick prevention
- Frequency of administration
- Intended use
- Market
- Pricing









Contains and describes all relevant RTF syringe information

Agreed on and signed between supplier and pharma company

- Product
- Product Packaging
- Shipment Packaging
- Labeling
- Storage
- Shelf Life
- Quality System
- Regulatory Compliance
- Sampling
- Documentation
- Attachments
- Customer Responsibilities

Volume	1.0 mL long
Cannula/ Cone	staked needle, 27G, 1/2 inch, 3B NW
Closure	RNS grey Stelmi 4800GS
Finger Flange	Cut Finger Flange
Siliconization	Oily siliconized: 0.5 mg
Nest size	160 syringes
Packaging – Bag	Single Bag
Packaging – Pallet	Euro Pallet

#### What is missing?

-no plunger stopper, no rod, no drug

-RTF= "ready to fill", i.e. one component of the final filled and stoppered syringe -empty






#### Materials (glass, polymer)


- The syringe is made from borosilicate glass, hydrolytic resistance type 1...
- COP or COC

#### Shape, Diameter of syringe

- Properties and dimensions are in accordance with DIN ISO 11040, if nothing different is specified
- Dimensions are according to the drawing no. xxx

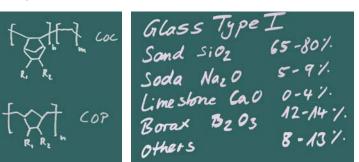

ref		► mm ◄		► ft inch
0.5 ml	47.6	6.85	4.65	1/2
1.0 ml long	54.0	8.15	6.35	1/2
1.0 ml standard	35.7	10.85	8.65	1/2   5/8
1.5 ml	43.2	10.85	8.65	1/2  5/8
2.25 ml	54.4	10.85	8.65	1/2

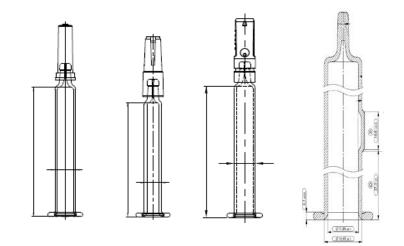





1/2" [12.7 mm]


#### Cone

- Integrated needle syringe, luer lock adapter or luer cone all with cap
- Description of cannula e.g. 27G 1/2"

#### Needle shield, tip cap

 Elastomer cap described in specification - rubber formulation, design



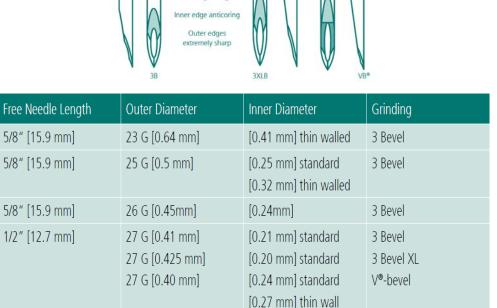

[0.28 mm] thin wall

[0.19 mm] thin wall

[0.20 mm] standard

Facet grinding

29 G [0.33 mm]



pda.org

3 Bevel

3 Bevel XL V®-bevel



#### **Mechanical properties**

- Special mechanical tests can be defined:
  - cone breakage, shoulder breakage, finger flange breakage
- Needle shield or cap pull-off force range given


#### Siliconization

- Mostly Dow Corning DC 360
- Special siliconization types defined e.g. baked-on siliconization (to meet USP 789)
- Needle siliconization, glue description

#### **Chemical Properties**

- Borosilicate glass Type 1, supplier name often stated
- Tungsten levels can be specified
- EtO treatment according to DIN EN ISO 11135 and ISO 10993-7- Ethylene Oxide Sterilization Residuals



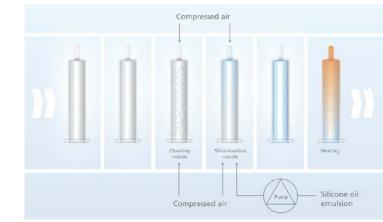



### Quality and Regulatory guidelines and technical standards: EU / US / ISO

- ISO 9001 "Quality Management Systems -Requirements"
- ISO 15378 "Primary packaging materials for medicinal products - Particular requirements for the application of ISO 9001:2008, with reference to Good Manufacturing Practice (GMP)"
- 21 CFR 211, Subpart E "Current Good Manufacturing Practice for Finished Pharmaceuticals"
- 21 CFR 820 "Quality System Regulation -Medical Devices"
- ISO 13485 "Medical Devices Quality Management Systems"







#### Sterility

- Ph. Eur. 2.6.1 USP <71>
- Sterility Tests according to ICH Q4B Annex 8

#### **Bacterial Endotoxins**

• Ph. Eur. 2.6.14 and USP <85>

#### **Glass container**

- Ph. Eur. 3.2.1, USP <660>, JP 7.01
- ISO 4802-2 Hydrolytic Resistance, Container Class HC1
- ISO 11040-4 "Prefilled syringes Part 4: Glass barrels for injectables"
- Ph. Eur. 2.4.20, USP <211> Arsenic

#### Cannula

• ISO 9626" Stainless steel needle tubing for the manufacture of medical devices"

#### RNS and tip caps: Rubber formulation

- Ph. Eur. 3.2.9, USP <381>
- ISO 8871"Elastomeric parts for aqueous parenteral preparations"
- USP <87>, USP <88>: "Biological Reactivity Tests"

#### Lubricant

 Conformity to applicable Monographs of EP and USP, current editions

#### Adhesive

• USP <88> "Biological Reactivity Tests, in Vivo"

#### General

- BSE/TSE -
- CONEG Toxic Packaging legislation.
- Mercury and hexavalent Chromium





#### Drawings and description of packaging

- Syringe
- Nest, tub
- outer packaging and labeling
- pallet

#### Sampling

According to DIN ISO 2859 – 1


#### Documentation

- Certificate of Conformance (CoC) with each delivery
- The CoC states the batch information
  - conformance of all components
  - EtO residues
  - Sterility
  - Endotoxin level of the syringe

#### CONNECTING PEOPLE SCIENCE

#### **Approval page**

- Signatures of Supplier
- Signatures of customer

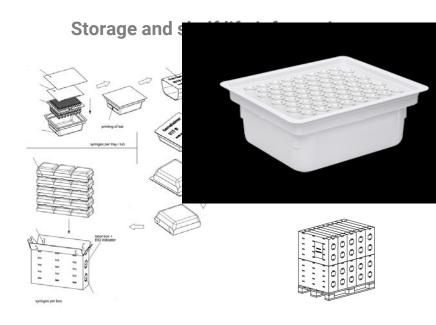



#### **Defect evaluation lists**

- describe possible defects
  Acceptance Quality Limit AQL
- Define Pharma quality criteria
- "Quality level that is the worst tolerable" ISO 2859-1 Give a probability of defects

#### **Possible defects:**

- Packaging e. g. labeling or damaged tub
- Syringe barrel e.g. cracks or deformations
- Dimensional defects e.g. of total length with cap
- Cannula e.g. hooks or contamination
- Closure e.g. pull-off force oot or pierced
- Chemical tests esp. hydrolytic resistance
- Sterility issues after EtO
- Siliconization e.g. glide force oot

**How many samples** should be picked and inspected among a batch of product or parts?

Where is the limit between acceptability and refusal when it comes to defective products?

#### Example:

"I want no more than 1.5% defective items in the whole order quantity, on average over several production runs with that supplier" means the AQL is 1.5%.

For most consumer goods, the limits are:

- 0% for critical defects (totally unacceptable: a user might get harmed, or regulations are not respected).
- 2.5% for major defects (these products would usually not be considered acceptable by the end user).
- 4.0% for minor defects (there is some departure from specifications, but most users would not mind it).

This tool is used during final inspections (before the products are ready to be shipped out)



# Possible Defects



PDA

von pharmazeutischen Packmitteln

**AKP** 

Fehlerbewertungsliste für Behältnisse aus Röhrenglas

5. Auflage 2016

**Defect Evaluation List** for Containers Made of Tubular Glass


5th Edition 2016





















COPYRIGHT © PDA 2018









### **Test procedures**

<u>11040-7 ISO</u> <u>11040-8 ISO</u> <u>80369-7 ISO</u>





### Limits of a Syringe Specification - Drug properties

#### Not part of the syringe specification

- Impact of different drug properties
- Stability testing with drug
- Risk of drug interactions with syringe components
- Risk of impaired functionality
- Leacheables test
- Syringe is not a combination product

Prefillable syringe becomes a combination product after filling MDR not fully applicable Usability studies not fully covered with empty syringes

#### Comprehensive tests need to be carried out at the Pharma company

- Stability testing with drug
- Mechanical tests e.g. with Autoinjector and drug
- Performance with formulation (e.g. glide force, break tests) Particles to be tested with drug formulation



16

