Particle Identification

Markus Lankers, PhD November 2021











Root cause, particle characterization

Investigation regarding the metal particulate contamination in lots was inadequateThe atypical contamination found in these lots was metal, however, the batches were not rejected. Additionally, there was no investigation conducted to determine the cause of the black metal particulates found in these lots

"reported a particle identified in a vial during an AQL inspection. There was no documentation on the identity of the particle and whether it was inherent or foreign (black debris, fiber, glass fragments, etc.)."

2015








Visual Inspection Lifecycle

- Use the Trending Data from Reject Characterization and Monitoring
- Review the various particulate sources for Process Improvement opportunities
- Focus on the most predominant particle types
- Repeat the Cycle of Monitoring, Trending, Corrective actions and follow-up Monitoring

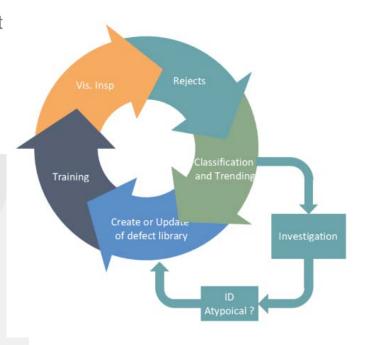







Classification and Trending





When do I need which kind of information?

Number of rejects

Investigation required e.g. AQL reject,

Fraction of rejects: e.g.. Verification of common reject

All rejects

Level 3 spectroscopy Very detailed information, time consuming Level 2 isolation and microscopy, good level of Differentiation Level 1 Classification basic information, fast





Quality Control Methods Particulate Characterization/ID Levels



- Nondestructive, as seen during manual inspection
- Light, dark, sinking, floating, color, shape, etc.




- Rapid characterization to specific material categories
- Metallic, glass, rubber, plastic, fiber (natural or synthetic), silicone lubricant, inherent particles, etc.

Level Three: Spectroscopic or other fingerprint ID

• FTIR, Raman, Elemental, Mass Spec, etc.









Comparison of Characterization Level

Level		Cost	time/particle
1	light microscopy	Invest: 2T€ €	15 min
2	Isolation, Polarized Light microscopy	Invest: 60 T€	30 min
3	SEM / Raman/ IR	Invest: 70 T€ (IR), 150 T€ (Raman), 180 T€ (SEM)	30 min





Classification Level 1

- 1. Classification is based on basic observations Defined by trajectory, shape, density
- Classification could be done by a experienced operator probably trained for special tools
- 3. Reason to go on with level 2 characterization could be statistics, uncertainty about nature of the particle







Categories

Category		Category	
Glass-Like	[]	Polymeric-like	[]
Metallic-like	[]	Dark Particle	[]
Fiber-like	[]	Light Particle	[]

Attributes for further description

Shape	Colour	Location	Density	Size
Spherical	Light	Body	Floater	
Irregular	Dark	Bottom	Fixed	
Elongated	Transparent	Shoulder		





Microscopic investigation - Level 2

10

Level 1 characterization groups e.g. dark particle, light particles, fiber-like might be sampled by a basic universal sampling plan like $\sqrt{N+1}$

Isolation is required for further investigation Clean area mandatory:

 clean room, clean bench, ultra cleaned glassware, requires trained personnel

Various tools for isolation:

Capillary, tungsten needles, filtration

Microscope helps to give further details:

Rubber, metal, synthetic vs natural fiber, crystal shape, color
 After isolation particle can be easily transferred to level three





Microscopic information – Level 2

Anisotropic

Birefringence

Isotropic Rod

Uniform fiber
Irregular frayed

fiber

Pseudo-

Incident Light	Select	Transmitted Light	Select	Level II Category	Sele	ect	Level II Category	Sel	ect
Clear	[]	Transparent	[]	Glass	[]	Polymeric	[]
Opaque	[]	Opaque	[]	Metallic	[]	Rubber Stopper	[]
Reflective	[]	Crystalline	[]	Fiber	[]	Semi-Solid - Silicone	[]
Physical	Select	Crossed Polars	Select	Fiber - Natural	[]	Possible Inherent API	[]
Crystalline	[]	Isotropic	[]	Fiber - Synthetic	[]	Possible Extrinsic	[]





Shaving

Resilient

Size Length (um)


Size Width (um)

Shard



Trending after Level 1/2



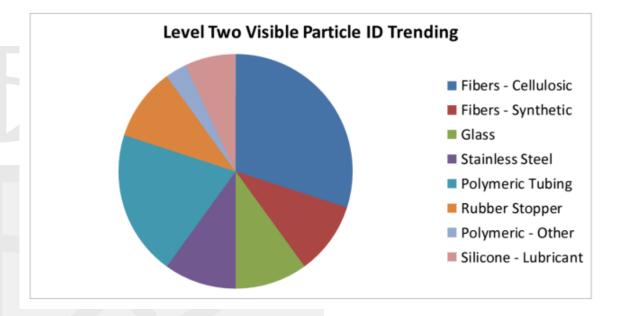






PDA

Spectroscopy Level 3

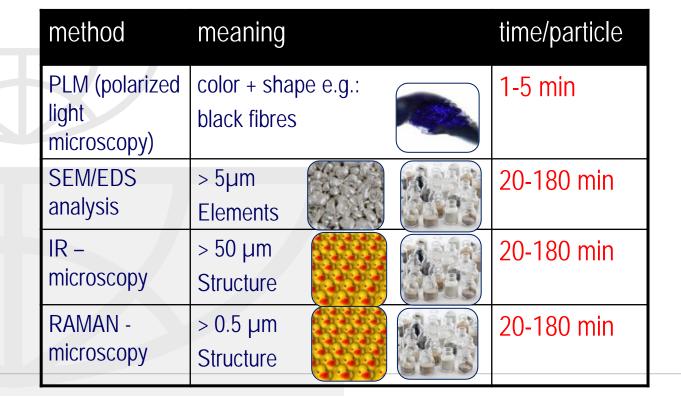






Fiber – Level 1

Category	Select			
Glass-Like	[]			
Metallic-like	[]			
Fiber-like	[x]			

Category	Select			
Polymeric-like	[]			
Dark Particle	[]			
Light Particle	[x]			



- Fibers can be easily classified. Might be sufficient for trending
- Further classification of fibers can be preformed in situ with an inverted microscope due to morphology and texture






Fiber – Level 2

- Microscopy of isolated fiber gives further information (cotton, protein based fiber, synthetic)
- Spectroscopy can give a very specific fingerprint for root cause or kind if synthetic fiber







Level 2

Level 2

Level 1





Metal particle Level 1 and Level 2

- Characterized density and reflectivity
- Sufficient for trending
- Hard to observe while swirling
- Usually easy to find at the bottom







Level 2




Level 2






Spectroscopy on metals – Level 3 ¹⁷

Spectroscopy gives more detailed information on the kind of steel e.g. low alloyed vs high alloyed steel which might be needed for root cause investigation

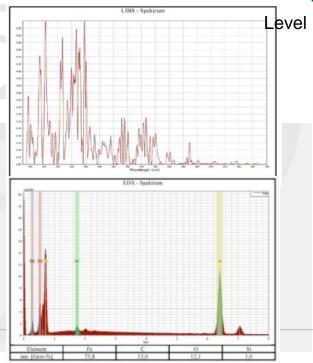

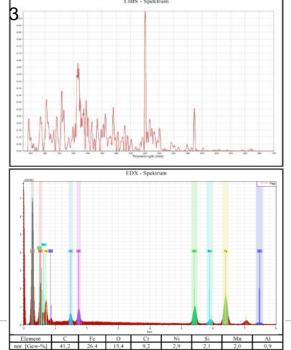





PDA Glass particle Level 1 and Level 2

- Glass has a very characteristic shape which is sufficient for classification
- Further characterization for root cause investigation: element specific methods e.g. SEM or LIBS favorable









Level 2





PDA Glass particle Level 3



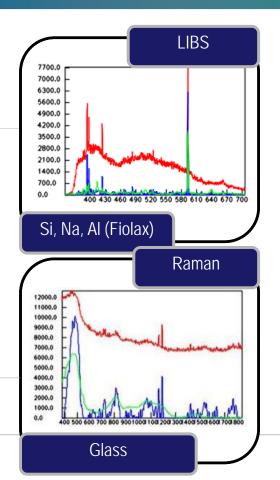

pda.org















Isolation





- - Class 100 clean bench is essential
 - "Ball-park" clean rooms would be beneficial
 - Cleaning is essential and system suitability tests (blanks) have to be taken
 - Training and control is essential
 - Benches, coats, sleeves, microscopes, equipment and water should be clean and non-shedding



23




Isolation and transportation




Tungsten needles for particle picking



Capillary trapping



Sending particles to a lab between 2 slides









Particle Sources





Origin makes the difference

Inherent

Particulate made entirely of components of the formulated product, arising from the product itself. These particulates are related to the product formulation: API

Intrinsic

Particulate related to the production process of components of the formulated product, arising from the product itself. Processing Equipment, Primary Package, Active and other ingredients

Extrinsic (Foreign)

Environmental Contaminants insect parts, hair, fibers, paint, rust





Sources for particulate matter?

personnel



- Garnement
- Water
- container






- Process / Production Equipment e.g.: rubber
- Cleaning process





Visible

PDA

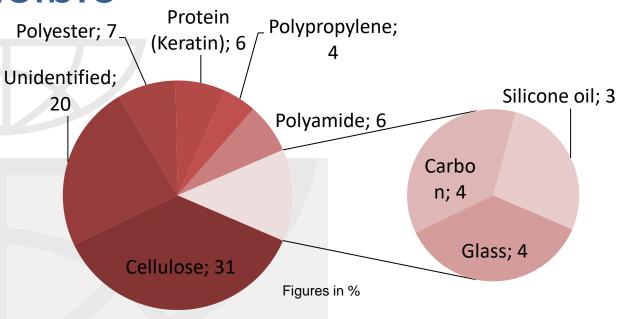


Cellulose, Polyester and Protein/Polyamide particles







Sub-visible

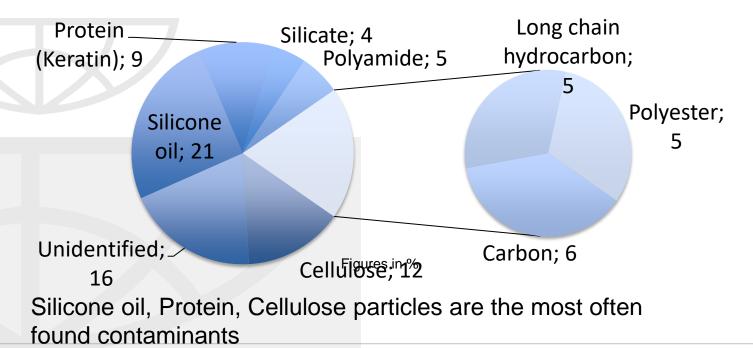





Top Ten in more detail

- Cellulose: mostly fibres
 - source: clothes, towels, wipers, autoclave paper



- Longchain hydrocarbon
 - source: rubber (stopper), PE (bottles)





Top Ten in more detail

- Glass: fibres and particles
 - Source: Primary packaging
 - But also glassfibers and hollow glass fibres (filter material)
- Carbon: particles
 - Usally black particles contain high content of carbon:
 - Sealings rubber material filled with carbon
 - Burned material





PDA® Parenteral Drug Association precing People Science and Regulation®

Top Ten in more detail

31

- Polyester: fibres and particles
 - Source: Cleanroom clothes and defect filter
- Protein: mostly flakes
 - Source human dust, protein particles from protein solution
- Silicone oil: compact particles
 - Source: sealings, siliconisation









Rubber related defects

- White or black spots on/between lips
- Foreign material trapped between plunger and glass wall Glass bits
- Rubber chunks
- Fibres
- Hair












Root cause

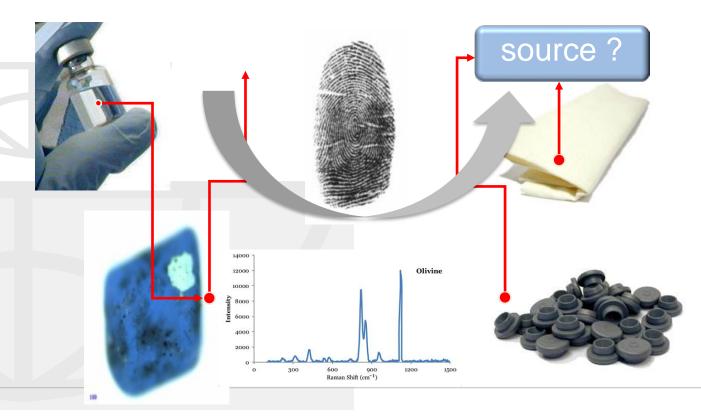





Root cause

- Documentation of the defect →in-situ (in the closed container)
- 2. Filtration and documentation of the sample on the membrane filter
- Documentation of the analysis and the identification of the reject by Raman spectroscopy
- 4. Identification of sub-visible to gather further information
- 5. Verification of the findings (particle observed by visible inspection) with FT-IR or LIBS, EDX



PDA°


Particle in a vial







2. Particle Imaging + raman.ID







 $L=505.0 \mu m$ $w = 202.6 \mu m$ E=2.49R = 0.3071




Raman.ID: Polyethylene-terephtalate, PET


Rank: 887





3. Verification by FTIR




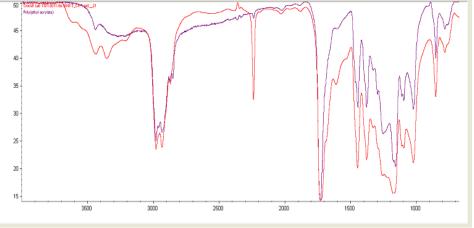






Visible Inspection: Particle Reject II

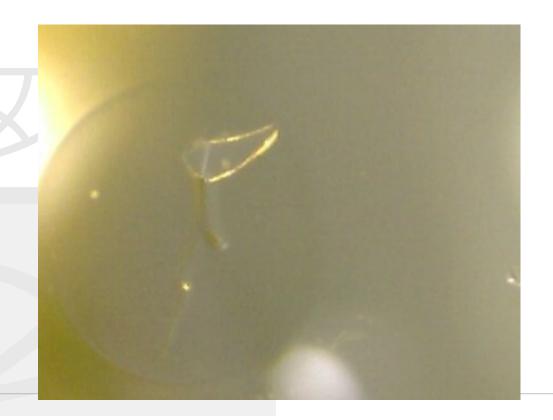







Sample prep. + Documentation

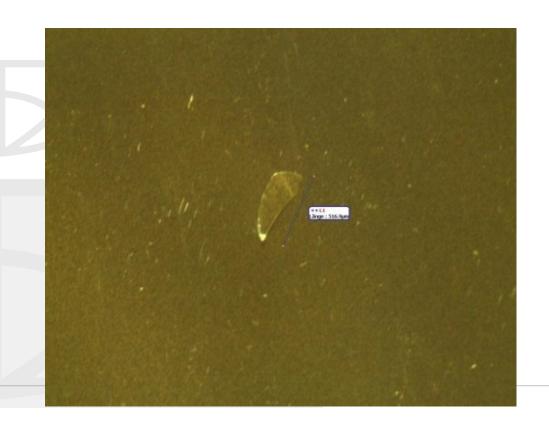





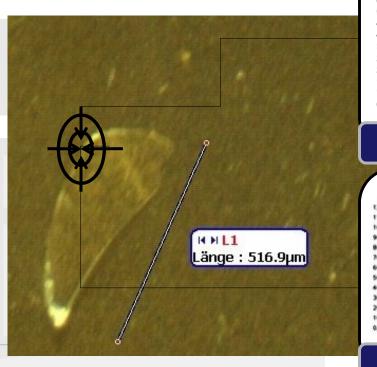

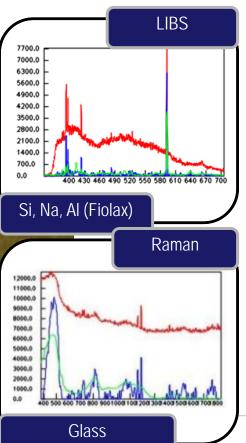







CELLULOSE SOURCE





Example Cellulose Source


- 4 batches failed in a row
- 3 samples of each of the failed batches and one of the good batches were investigated
- Soon it became clear that the problem was cellulose related....





PDA°


Several cellulose fibers were found

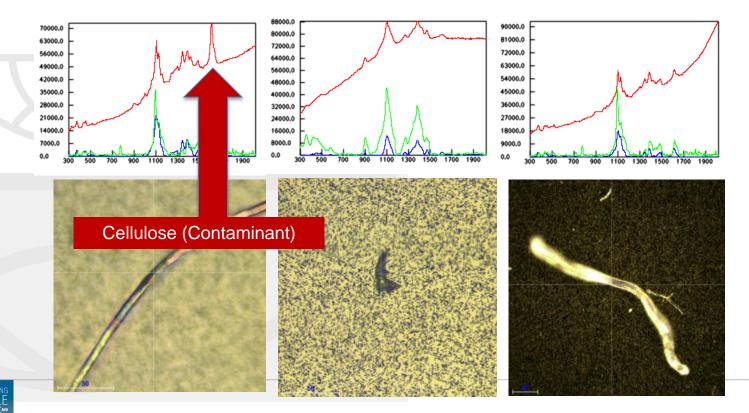






Samples from the filling were taken

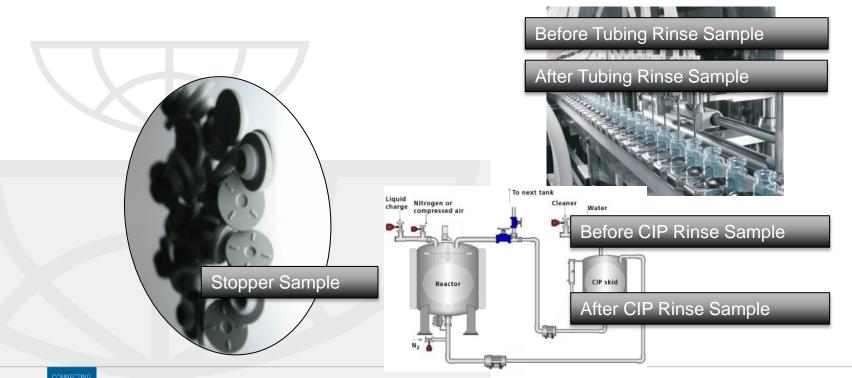



Samples from the process were taken



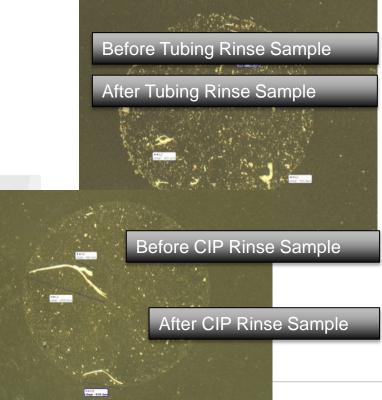






Patabase with filling line related materials


was built

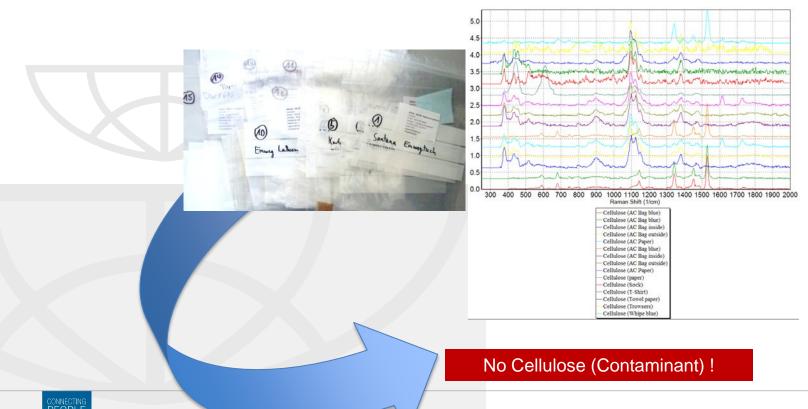

Tube rinse result





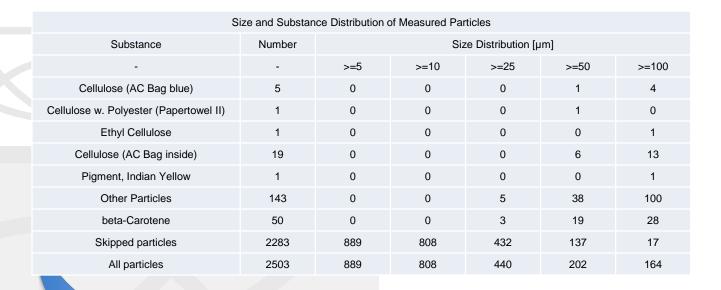





Claser look into the API production (site in Italy)




Size a	nd Substance	Distribution	of Measured	Particles		
Substance	Number	Number Size Distribution [µm]				
-	-	>=5	>=10	>=25	>=50	>=100
Cellulose (AC Bag blue)	1	0	0	0	1	0
Labcoat	1	0	0	1	0	0
Fluorescence	1	0	0	1	0	0
Carbon	4	0	0	3	1	0
Cellulose	1	0	0	0	1	0
Indanthrene Blue	1	0	0	1	0	0
Cellulose (Contaminant)	31	0	0	8	18	5
Pigment, Indian Yellow	3	0	0	3	0	0
Polysulfone	5	0	0	1	2	2
Cellulose (Towel paper)	5	0	0	5	0	0
Other Particles	28	0	0	22	1	5
Skipped particles	1716	1353	362	1	0	0
All particles	1797	1353	362	46	24	12





Samples from API tanks and tubings showed

PDA
Parenterel Drug Association
This type of fiber.

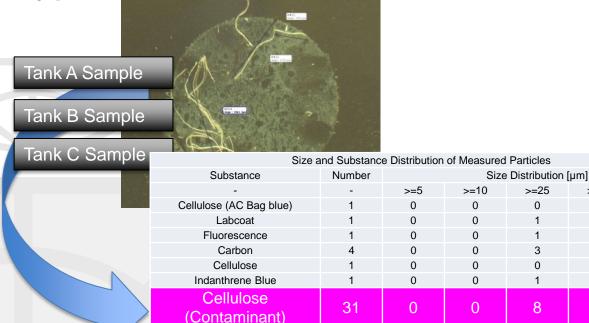

Pigment, Indian Yellow

Polysulfone

Cellulose (Towel paper)

Other Particles

Skipped particles

All particles



pda.org

>=25


>=50

>=100



Hodate of the library with towels used in API

production

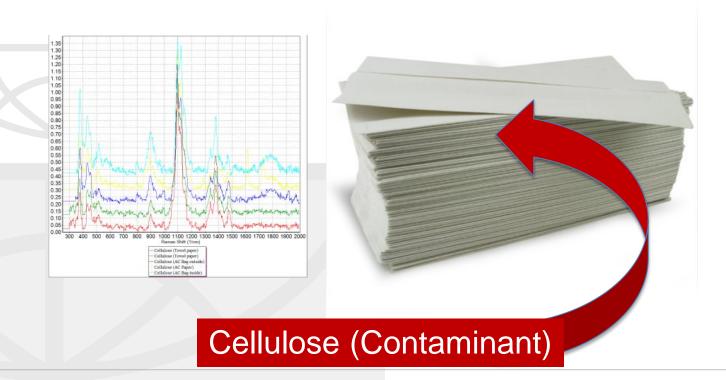





Conclusion Cellulose Example

- One special type of cellulose could be identified by the typical peak @ 1600
- Database was built with suspect cellulose samples used in production
- These Cellulose (contamination) fibers were found in smaller concentration in CIP rinses no fibers ...were found in the process prior to filling!
- Samples from API tanks and tubings showed this type of fiber.


→ API manufacturer used paper towels and introduced cellulose into the process








Control Your Packaging Material

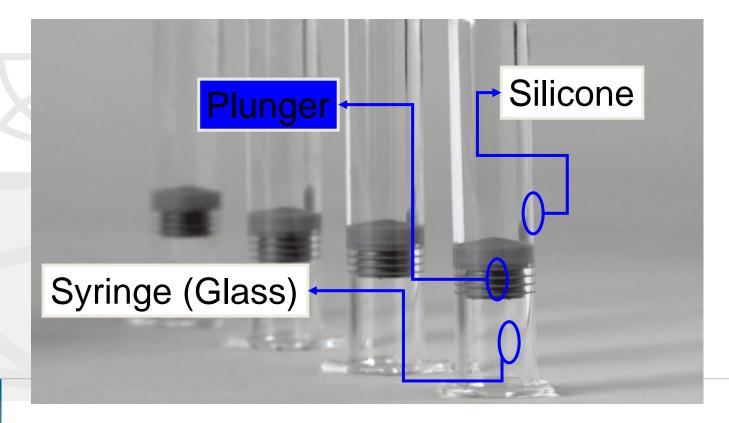



ISO 8871-3



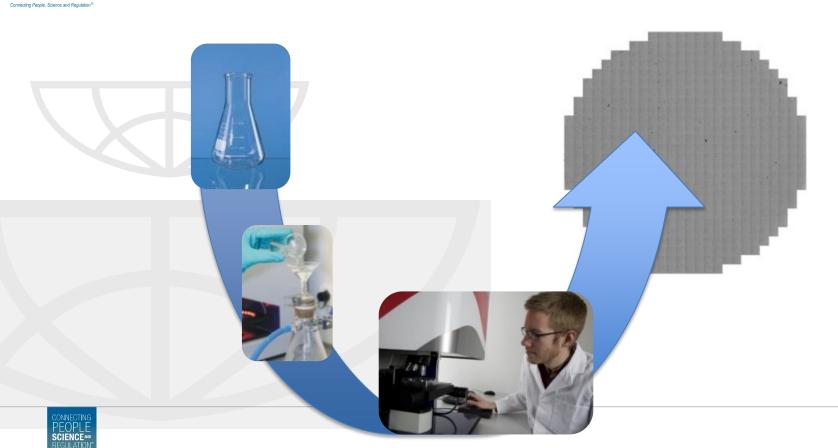




PDA

Fibers and particles on rubber

- 10 stoppers contaminated with fiber Cleaning following ISO 8871
- 51 particles > 50 μm found

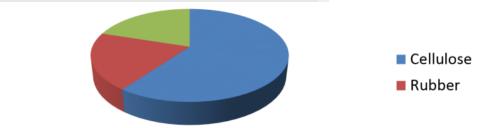


Large scattering in particle number and composition can be observed in one batch and different bags







- 10 stoppers contaminated with particles Cleaning following ISO 8871
- 144 particles found > 50 μm

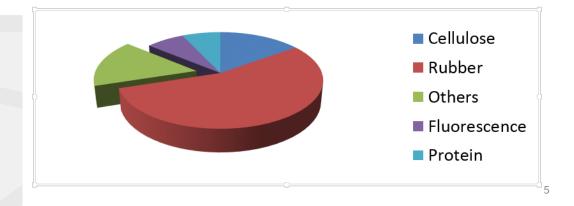







Rubber related particles



Stopper Bags have an impact or reflect stopper quality







Fibres collected from one bag; 45 particles > 25 µm




Test Procedure: Bag rinsed with 250 ml water / SDS, filtration,

counting

PDA Parenteral Drug Association Connecting People, Science and Regulation®

Rubber related particles






RESULT: Cellulose [Paper] RANK: 882, S/N: 39.2





Rubber related particles

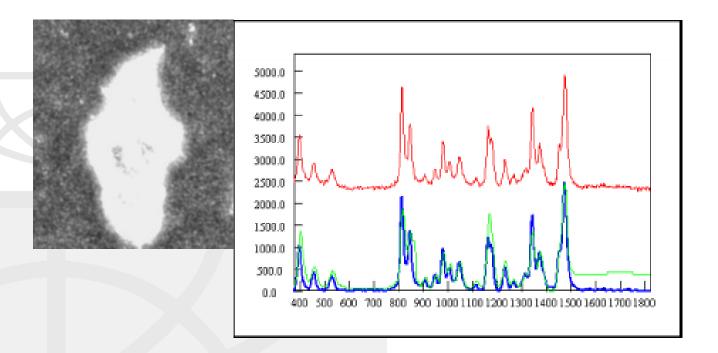





PDA Time bombs



- Increase of rejects with time
- Chemical reactions taking some time
 - Silicone oil on stoppers:
 Agglomeration of Proteins
 - Coatings
 - Glass delamination







Turbidity / Haziness


60





Observation of haziness and aggregates in a new a new batch after slight process change










Silicone Protein Aggregation

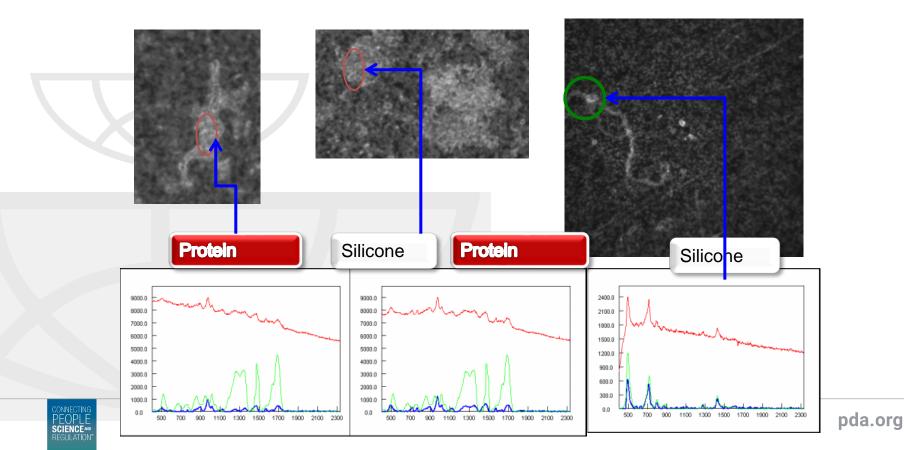






VISIBLE INHERENT PARTICLE



Visible Inherent Particle





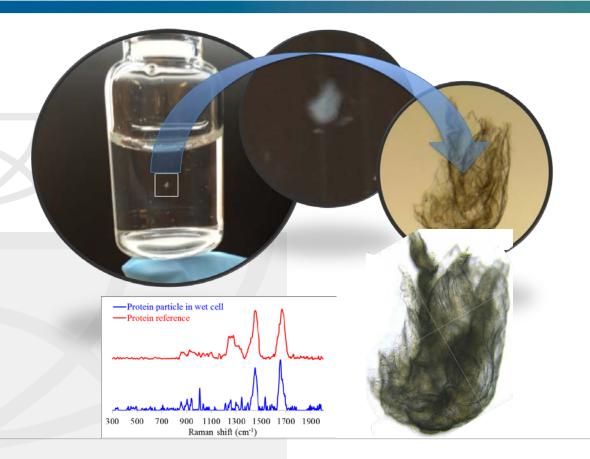








Increasing number of rejects in visual inspection with time

Coating

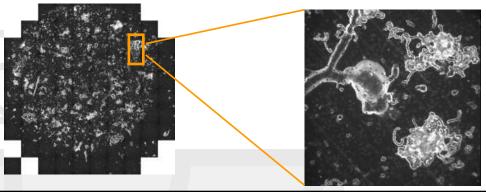

Size and Substance Distribution of Measured Particles						
Substance	Number	Size Distribution [µm]				
-	-	>=10	>=25	>=50	>=100	
Proteine	6	0	0	1	5	
Fluorescence	18	0	0	1	17	
Coating	185	23	44	32	86	
Skipped particles	3058	2142	657	232	27	
All particles	3267	2165	701	266	135	



65



Supplemental Testing or Inspection

Destructive reconstitution, dilution, transfer, clearing, solubilizing, filtration, screening, or sieving that mallows a product to be visually examined or evaluated microscopically to determine the presence, type, and size of foreign particulate contamination present within the product, container, or device.

Destructive Inspection and Test Methods

- Reconstitution
- Filtration
- Clarification
- Transfer Dilution
- Sieve/Mesh
- Panning
- Rinse/Flush and Filtration









Technical Report No. 79

Particulate Matter Control in Difficult to Inspect Parenterals

5.3 DIP Product Formulations

Common inspection or testing approaches for DIP product formulations are listed in Table 5.3-1.

Table 5.3-1 Common Inspection or Testing Approaches for DIP Product Formulations

DIP Formulation Type	Common Destructive Methods Applied	Method #
Deeply colored solutions (opaque)	Filtration and microscopic exam in sub-visible and/or visible ranges	2
	Transfer and dilution (if required) in a verified clean transparent container followed by visual inspection	4
Emulsions	Clarification and visual Inspection	3
	Clarification → Filtration and microscopic exam in sub-visible and/ or visible ranges	
	Sieving	5
	Additional considerations: - Inspection of settled product with observation of bottom layer for dispersion of dense (sinking) metallic or glass particles	
Gels	Direct visual inspection (USP <790> with modifications, if needed, for increased illumination and dwell time)	USP790
	Dilution → Filtration and microscopic exam in sub-visible and/or visible ranges	4
Lyophilized (freeze-dried product)	Reconstitution and visual inspection	1
	Reconstitution → Filtration and microscopic exam in sub-visible and/or visible ranges	2
	<1 ml Small volumes reconstitution and pooling	4
Powders, API	Reconstitution and visual inspection	1

