

Visual Inspection of Injectable Products:

Inspection Technologies

John G. Shabushnig, Ph.D. Insight Pharma Consulting, LLC insight!

johnshabushnig@aol.com March 2018

> An Introduction to Visual Inspection © 2018 John G. Shabushnig

"I see no more than you, but I have trained myself to notice what I see."

Sherlock Holmes in *The Adventure of the Blanched Soldier*





- Manual Inspection
- Semi-Automated Inspection
- Automated Inspection




Manual Inspection

Connecting People, Science and Regulation®

An Introduction to Visual Inspection © 2018 John G. Shabushnig


4

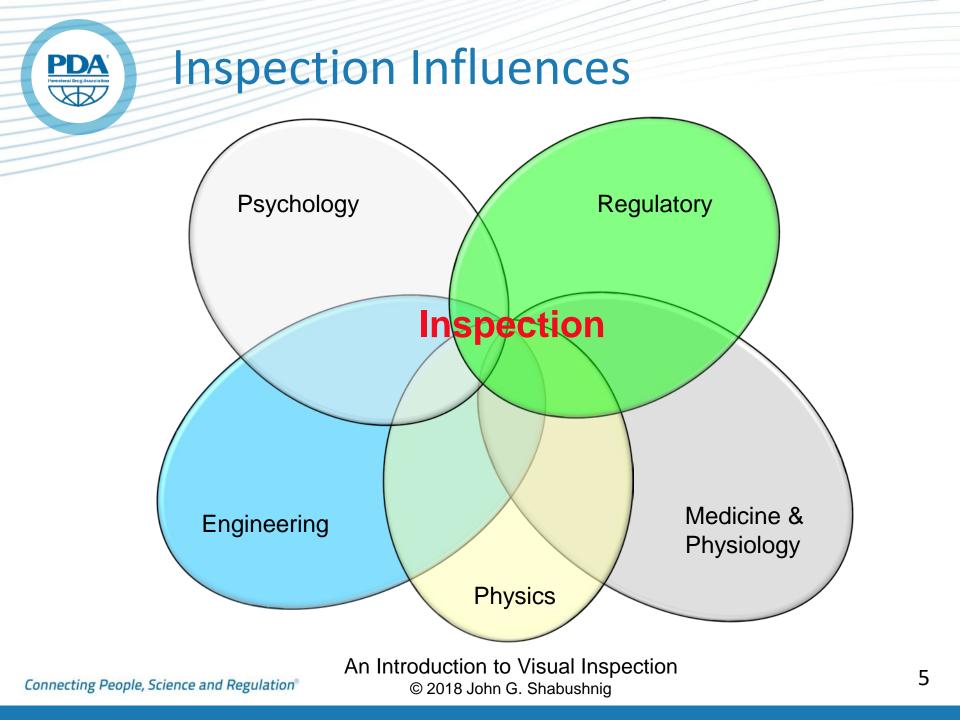

Inspection

PDA

X

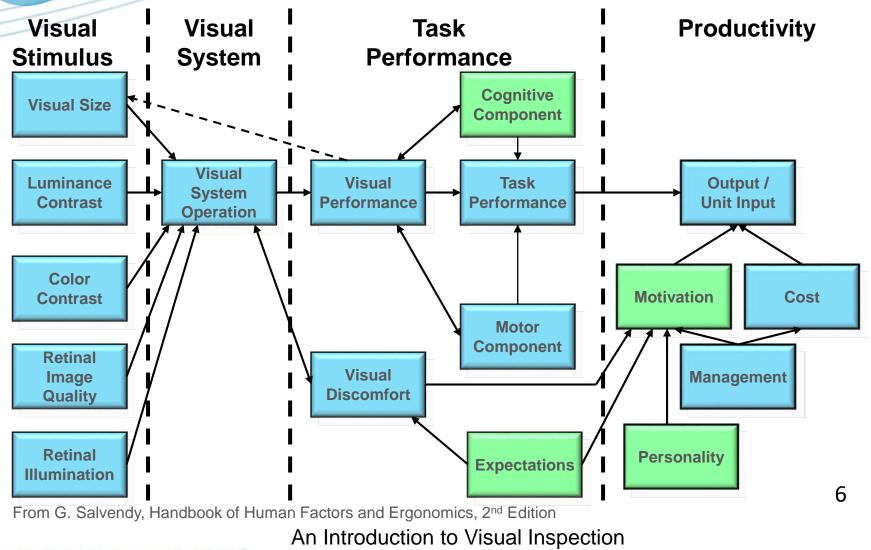

Connecting People, Science and Regulation®

© 2018 John G. Shabushnig



Manual Inspection



An Introduction to Visual Inspection © 2018 John G. Shabushnig







Connecting People, Science and Regulation®

Critical Inspection Parameters


Lighting

PDA

- Illumination Intensity
- Uniform, Flicker-free
 - Fluorescent, Incandescent, LED
- Tyndall (dark-field)
- Background
 - Black / White
- Presentation and Manipulation
 - Swirl and/or invert
- Pace
 - 10 sec / container reference




- Luminous Intensity
 - 1 candela = 1/638 W/sr
 - formerly candlepower
- Illuminance
 - $-1 \text{lux} = 1 \text{lumen/m}^2$
 - -1 foot-candle = 1 lumen/ft²
 - -1 fc = 10.75 lux
- Inverse Square Law
 - illumination = luminous intensity/d²

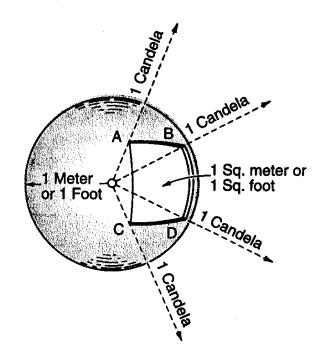




- USP, EP, JP and WHO
 - 2,000-3,750 lux, Higher (e.g., 8,000-10,000 lux for difficult to inspect containers and products)
- ChP
 - 1,000-1,500 lux (clear solutions), 2,000-3,000 lux (colored solutions and glass, plastic containers)
 - 4,000 lux (suspensions, emulsions)
- IESNA
 - "Difficult Inspection", visual tasks of low contrast and small size. 1,000 lux
 - "Exacting Inspection", visual tasks near threshold.
 3,000-10,000 lux



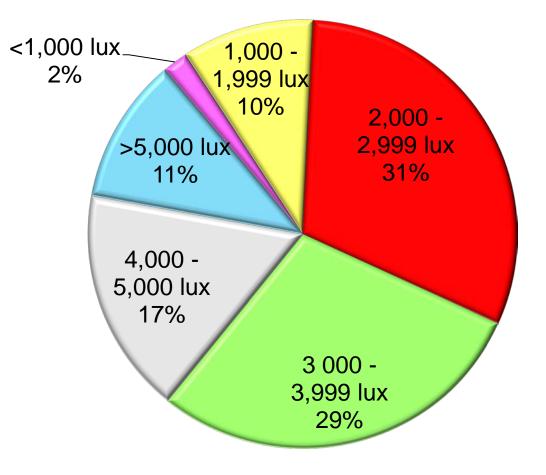



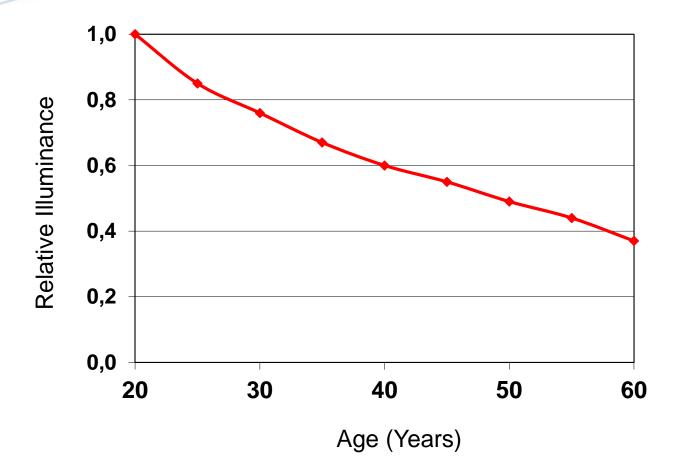

From IESNA Lighting Handbook, 9th Edition

An Introduction to Visual Inspection © 2018 John G. Shabushnig


Manual Inspection Conditions

- 73% control inspection time or the pace of inspection.
 - 46% with Timer
 - 29% by SOP


PDA

- 24% with Conveyor
- 26% use a magnifier.
 - 44% 2X, 25% 3X, 8% 4X, 8% 5X, 14% >5X
- 6% use a polarizer.
- Light Source used:
 - 73% Fluorescent, 19% LED, 18% Incandescent,

What is the average inspection time for this container type?

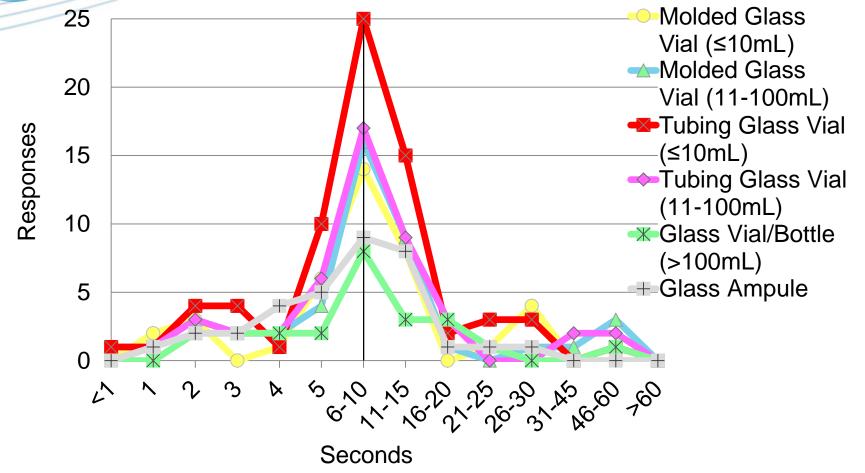



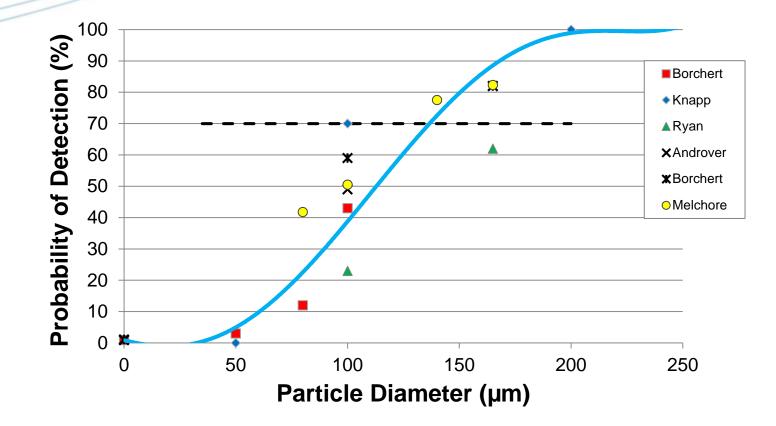

From Shabushnig, Melchore, Geiger, Chrai and Gerger, PDA Annual Meeting 1995

An Introduction to Visual Inspection © 2018 John G. Shabushnig

PDA Inspection Performance

- Human Inspection
 - Visual acuity
 - Fatigue
 - Flexibility
- Probabilistic
 - Especially true for particulate matter due to continuously changing presentation.



Semi-Automated Inspection

Semi-Automated Inspection

- Machine Material Handling
 - Transport, Spin/Rotation, Traying
 - Consistent lighting and presentation
 - Manual or Machine Rejection
- Human Inspection
 - Quality Decision

PDA









Inspection Performance

Semi-Automated

PDA


- Similar to manual
- May have poor sensitivity for heavy particles
 - Particles stop moving before inspection
- Improved ergonomics
- Improved throughput



Automated Inspection


An Introduction to Visual Inspection © 2018 John G. Shabushnig



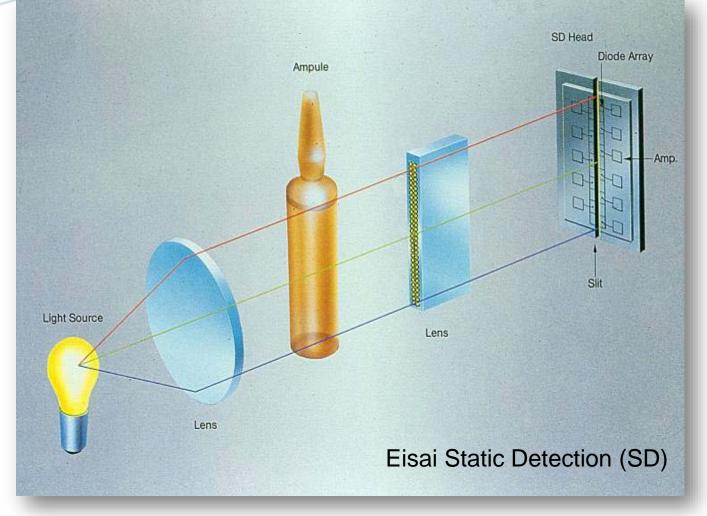



Automated Particle Inspection

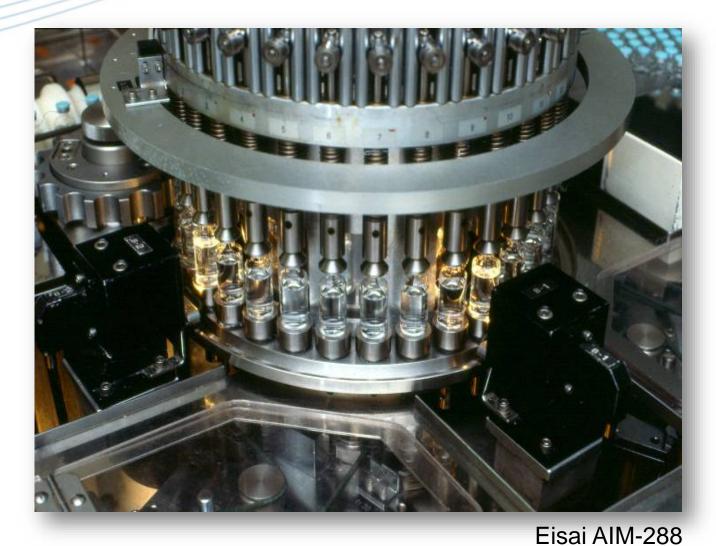


An Introduction to Visual Inspection © 2018 John G. Shabushnig





Eisai EIS-596

An Introduction to Visual Inspection © 2018 John G. Shabushnig

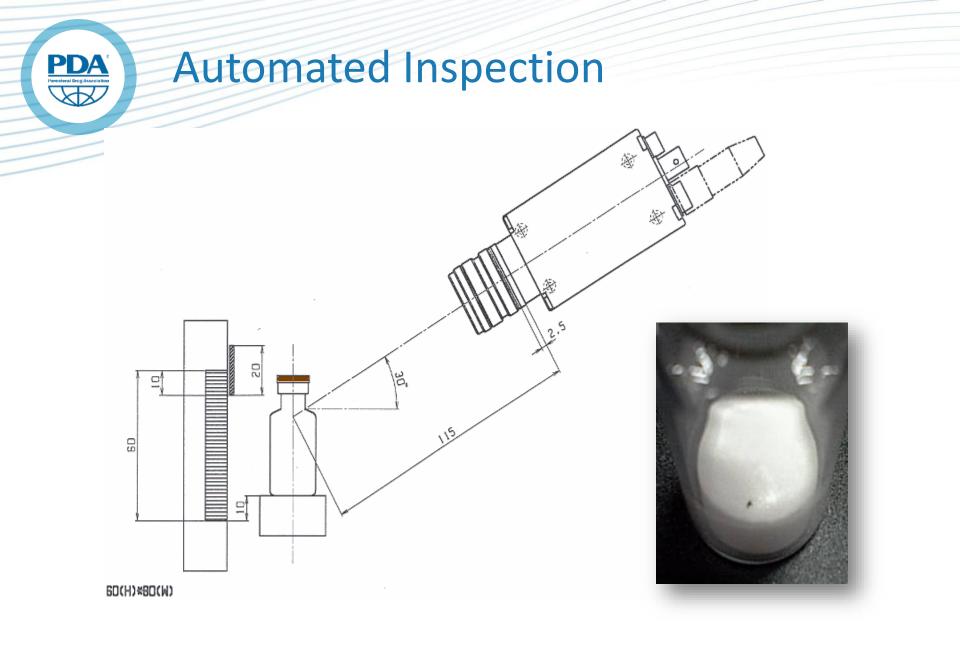


Inspection Performance

Machine Inspection

PDA

- Adjustable Sensitivity
 - Increased sensitivity must be balanced with increased false rejection rates.
 - Often product dependent
 - viscosity, surface tension, container design and variability
- Improved Reproducibility
- Improved Throughput
- High Initial Investment

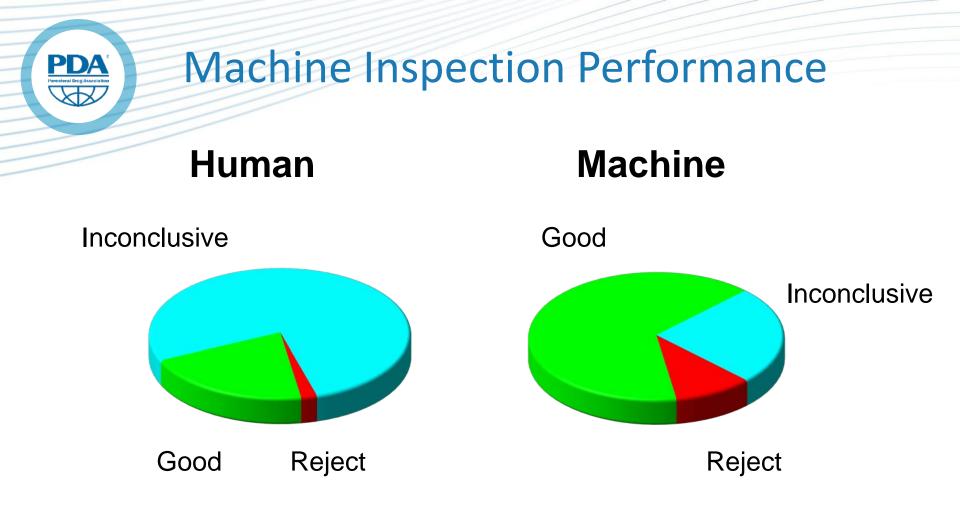

A set of 250 vials was inspected 20 times by each method. Any vial not classified consistently 20 of 20 times was classified inconclusive.

An Introduction to Visual Inspection © 2018 John G. Shabushnig



2014	2008	2003	1996
49%	33%	46%	33%
17%	24%	19%	20%
33%	43%	35%	42%
54%	36%	63%	48%
18%	26%	15%	42%
28%	39%	20%	5%
	49% 17% 33% 54% 18%	 49% 33% 17% 24% 33% 43% 54% 36% 18% 26% 	49% 33% 46% 17% 24% 19% 33% 43% 35% 54% 36% 63% 18% 26% 15%

Does your firm have plans to replace manual inspection with automated inspection?

	2014	2008	2003	1996
Shift to Automated Inspection	50%	67%	50%	68%
Justification				
Quality	85%	75%	92%	92%
Productivity	87%	92%	92%	100%
Other	5%	0%	8%	17%

PDA





Connecting People, Science and Regulation®



How frequently do you challenge or retest automated inspection equipment?

	2014	2008	2003	1996
Never	1%	0%	0%	15%
Each Shift	1%	8%	13%	8%
Start of Lot	46%	42%	75%	38%
Start and End of Lot	8%	ND	ND	ND
Daily	15%	25%	19%	23%
Weekly	2%	0%	0%	8%
Monthly	2%	ND	ND	ND
Quarterly	1%	ND	ND	ND
Annually	19%	ND	ND	ND

ND = No Data, question not asked in survey from this year An Introduction to Visual Inspection © 2018 John G. Shabushnig



BEAUTIFUL, BUT OBSOLETE.



An Introduction to Visual Inspection © 2018 John G. Shabushnig